

PrintTex®

DESCOR® PREMIUM Acoustic

Specifications

REF.	699144 085
	100 % polyester knit fabrics PVC-free, recyclable
	ca. 320/ 420/ 520cm ca. 126/ 165/ 205 inch other widths available on request
	B-s1, d0 DIN EN 13501-1 Class A ASTM E84-16
	ca. 190 g/m ² ca. 5.6 oz/yd ²
	rolls 50 m 55 yd
	blank: 7 DIN EN ISO 105-B02
	ca. 0,39 mm ca. 390 µm
	cold, heat, ultrasonic cut
Specs	with micro-perforation air permeable

Printing methods


print	UV	Latex	Dyesub
Inside	•		
Outside			

Certifications



Acoustic absorption value α_w /class*: 0.90/ A

Type of assembly E-50 according to DIN EN ISO 354.
Textile in front of total 50 mm, included
40 mm ISOVER SSP 2 and 10 mm airspace.

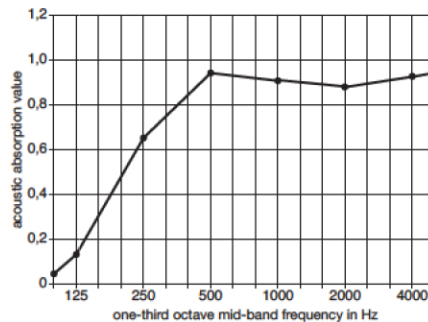

Please note, there may be slight variations in technical details for other DESCOR® colours.